



Aalborg Universitet

AALBORG UNIVERSITY
DENMARK

Measurement Capabilities and Equipment at the Building Material Characterization Laboratory of Aalborg University (2020)

Johra, Hicham

Publication date:
2019

Document Version
Publisher's PDF, also known as Version of record

[Link to publication from Aalborg University](#)

Citation for published version (APA):

Johra, H. (2019). *Measurement Capabilities and Equipment at the Building Material Characterization Laboratory of Aalborg University (2020)*. Department of Civil Engineering, Aalborg University. DCE Latest News No. 59

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal -

Take down policy

If you believe that this document breaches copyright please contact us at vbn@aub.aau.dk providing details, and we will remove access to the work immediately and investigate your claim.



DEPARTMENT OF CIVIL ENGINEERING
AALBORG UNIVERSITY

Measurement Capabilities and Equipment at the Building Material Characterization Laboratory of Aalborg University (2020)

Hicham Johra



Aalborg University
Department of Civil Engineering
Architectural Engineering

DCE Latest News No. 59

**Measurement Capabilities and Equipment
at the Building Material Characterization
Laboratory of Aalborg University (2020)**

by

Hicham Johra

December 2019

© Aalborg University

Scientific Publications at the Department of Civil Engineering

Technical Reports are published for timely dissemination of research results and scientific work carried out at the Department of Civil Engineering (DCE) at Aalborg University. This medium allows publication of more detailed explanations and results than typically allowed in scientific journals.

Technical Memoranda are produced to enable the preliminary dissemination of scientific work by the personnel of the DCE where such release is deemed to be appropriate. Documents of this kind may be incomplete or temporary versions of papers—or part of continuing work. This should be kept in mind when references are given to publications of this kind.

Contract Reports are produced to report scientific work carried out under contract. Publications of this kind contain confidential matter and are reserved for the sponsors and the DCE. Therefore, Contract Reports are generally not available for public circulation.

Lecture Notes contain material produced by the lecturers at the DCE for educational purposes. This may be scientific notes, lecture books, example problems or manuals for laboratory work, or computer programs developed at the DCE.

Theses are monographs or collections of papers published to report the scientific work carried out at the DCE to obtain a degree as either PhD or Doctor of Technology. The thesis is publicly available after the defence of the degree.

Latest News is published to enable rapid communication of information about scientific work carried out at the DCE. This includes the status of research projects, developments in the laboratories, information about collaborative work and recent research results.

Published 2019 by
Aalborg University
Department of Civil Engineering
Thomas Manns Vej 23
DK-9220 Aalborg Ø, Denmark

Printed in Aalborg at Aalborg University

ISSN 1901-7308
DCE Latest News No. 59

Contents

1. Foreword	6
2. Density, Mass and Volume	7
3. Thermal Conductivity	8
4. Specific Heat Capacity	11
5. Thermal Diffusivity	12
6. Humidity Content	13
7. Hygrothermal Properties: Water Vapor Sorption and Desorption Capacity.....	14
8. Gas Diffusion Coefficient	15
References	16

1. Foreword

The aim of this short communication report is to provide synthetic information concerning the measurement capabilities and equipment of the Building Material Characterization Laboratory of Aalborg University - Department of Civil Engineering [1]. This laboratory uses state-of-the-art equipment to determine the thermophysical properties and the heat-air-moisture transport characteristics of materials, and especially construction materials.

2. Density, Mass and Volume

The bulk density of material at room temperature and atmospheric pressure can rapidly be measured by assessing the volume (dimensions) of a sample with a precision ruler, a caliper or a micrometer, and the mass of that sample with a precision scale. For a very accurate measurement of the density of small-size samples (few millimeters or centimeters), one can use a specific experimental setup mounted on a precision scale and based on the Archimedes' principle of buoyancy [2].

- Precision **caliper** "Mitutoyo": measurement up to 300 mm; resolution 0.01 mm.
- Precision **micrometer** "Mitutoyo": measurement up to 25 mm; resolution 0.001 mm.
- Precision **scale** "Sartorius Entris": measurement up to 2200 g; resolution 0.01 g.
- Precision **scale** "Sartorius Entris" with protection glass enclosure: measurement up to 220 g; resolution 0.0001 g.
- Precision **scale** "Sartorius Cubis": measurement up to 5200 g; resolution 0.1 g.
- "Sartorius" **kit** for small-size sample density measurement with **Archimedes'** principle of buoyancy: sample diameter up to 40 mm.



Figure 1: Measurement of dimensions and volume with a precision caliper (left); accurate measurement of mass with a precision scale [3] (center); accurate measurement of the density of small-size samples with the Archimedes' principle of buoyancy on a precision scale [2] (right).

3. Thermal Conductivity

The thermal conductivity of various types of material or entire construction elements can be measured with the appropriate equipment. The choice of the equipment mainly depends on the size of the sample to be tested: Small-size samples are tested with the Laser Flash Analysis Apparatus, medium-size samples are tested with the Guarded Hot Plate Apparatus [4], large full-scale construction elements are tested with the Guarded Hot Box, and very large full-scale construction elements are tested with the Big Guarded Hot Box. The smaller the sample the faster the measurement.

- **Laser Flash Analysis Apparatus LFA 447 [5] (see Figure 2):**
 - Thin sample of uniform thickness with smooth surfaces (no fibers or large pores structures).
 - Powder, liquid, slurry, layered material, graded material, anisotropic material.
 - Thermal conductivity range 0.1 – 2000 W/m.K.
 - Temperature range 10 – 300 °C.
 - Round sample of diameter 6 mm*; 8 mm*; 10 mm*, 12.7 mm*, 25.4 mm*. Thickness 0.5 – 3 mm. *can be diameter down to 1.2 mm less than prescribed diameter.
 - Scanning mode local measurement of large sample: round diameter 40 mm; square 50 x 50 mm. Resolution of 0.1 mm.
 - Measurement speed: ~ 3 min/measurement.
- **Guarded Hot Plate Apparatus EP500 [4][6] (see Figure 2):**
 - Cubical sample of uniform thickness with flat surfaces (compression of sample is controlled).
 - Thermal conductivity range 0.005 – 2 W/m.K.
 - Temperature range 10 – 40 °C.
 - Compression pressure range 0.05 - 2.5 kN/m² (5000 - 25000 Pa).
 - Sample dimension : 15 x 15 cm for conductive material, 50 x 50 cm for insulating material.
 - Sample thickness range 1 – 12 cm.
 - Measurement uncertainty always below 1 % and mostly below 0.5 %.
 - Measurement speed: ~ 5 hours/measurement.



Figure 2: The Laser Flash Analysis Apparatus LFA 447 from Netzsch Gerätebau GmbH [5] (left); the Guarded Hot Plate Apparatus EP500 from Lambda-Messtechnik GmbH Dresden [6] (right).

- **Guarded Hot Box** (see *Figure 3*):
 - Large full-scale vertical construction element.
 - Square element with dimensions ranging from 1 x 1 m to 2 x 2 m.
 - Thickness of test element up to 70 cm.
 - Temperature range -20 – 80 °C.
 - Measurement speed: ~ 1 day/measurement.

- **Big Guarded Hot Box** (see *Figure 4*):
 - Very large full-scale vertical construction element.
 - Square element with dimensions 4 x 4 m.
 - Thickness of test element up to 1 m.
 - Temperature range -20 – 80 °C.
 - Measurement speed: ~ 2 day/measurement.

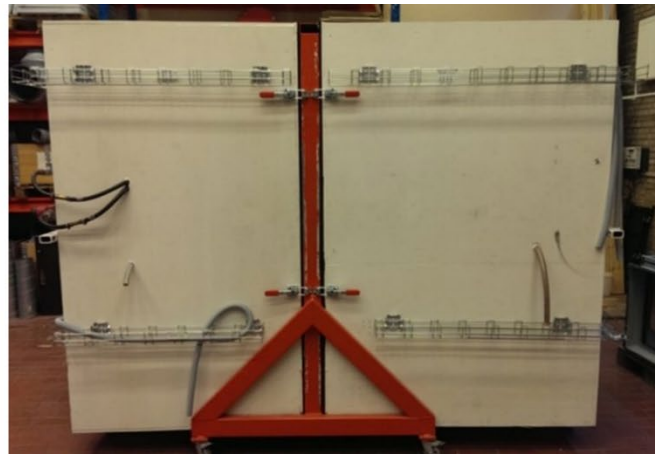


Figure 3: The Guarded Hot Box setup at Aalborg University, Department of Civil Engineering.



Figure 4: The Big Guarded Hot Box setup at Aalborg University, Department of Civil Engineering.

4. Specific Heat Capacity

The specific heat capacity of small samples can be measured with the Laser Flash Analysis Apparatus LFA 447 [5]. It is also possible to measure the local specific heat capacity of a larger sample with the scanning mode.

- **Laser Flash Analysis Apparatus LFA 447 [5]** (see *Figure 5*):
 - Thin sample of uniform thickness with smooth surfaces (no fibers or large pores structures).
 - Powder, liquid, slurry, layered material, graded material, anisotropic material.
 - Temperature range 10 – 300 °C.
 - Round sample of diameter 6 mm*; 8 mm*; 10 mm*, 12.7 mm*, 25.4 mm*. Thickness 0.5 – 3 mm. *can be diameter down to 1.2 mm less than prescribed diameter.
 - Scanning mode local measurement of large sample: round diameter 40 mm; square 50 x 50 mm. Resolution of 0.1 mm.
 - Measurement uncertainty: 5 %.
 - Measurement speed: ~ 3 min/measurement.



Figure 5: Laser Flash Analysis Apparatus LFA 447 (Netzsch Gerätebau GmbH) [5].

5. Thermal Diffusivity

The thermal diffusivity of small samples can be measured with the Laser Flash Analysis Apparatus LFA 447 [5][7]. It is also possible to measure the local specific heat capacity of a larger sample with the scanning mode.

- **Laser Flash Analysis Apparatus LFA 447 [5][7] (see Figure 5):**
 - Thin sample of uniform thickness with smooth surfaces (no fibers or large pores structures).
 - Powder, liquid, slurry, layered material, graded material, anisotropic material.
 - Thermal diffusivity range $0.01 - 1000 \text{ mm}^2/\text{sec}$.
 - Temperature range $10 - 300 \text{ }^\circ\text{C}$.
 - Round sample of diameter 6 mm^* ; 8 mm^* ; 10 mm^* ; 12.7 mm^* ; 25.4 mm^* . Thickness $0.5 - 3 \text{ mm}$.
*can be diameter down to 1.2 mm less than prescribed diameter.
 - Scanning mode local measurement of large sample: round diameter 40 mm ; square $50 \times 50 \text{ mm}$. Resolution of 0.1 mm .
 - Measurement uncertainty: 3% .
 - Measurement speed: $\sim 3 \text{ min/measurement}$.



Figure 6: Laser Flash Analysis Apparatus LFA 447 (Netzsch Gerätebau GmbH) [5].

6. Humidity Content

The humidity content of a moist material is measured by continuously monitoring the mass loss of the test sample (with a precision scale) when it is drying in an oven (see *Figure 7*).

- Oven temperature range room temperature - 300 °C.
- Interior volume 115 L.
- Measurement method speed: ~ 1 week.



Figure 7: Drying oven FP 115 (BINDER GmbH) [8].

7. Hygrothermal Properties: Water Vapor Sorption and Desorption Capacity

The moisture transfer, retention and release capacity of materials can be determined by measuring water vapor sorption and desorption isotherms. This can be done by the AquaLab VSA [9] with both the static and the dynamic isotherms methods: Dynamic Vapour Sorption (DVS) and Dynamic Dew Point Isotherm (DDI). The VSA Apparatus is much faster and simpler than other conventional methods.

- **AquaLab VSA** apparatus [8] (see *Figure 8*):
 - Small-size test sample: mass range 500 – 5000 mg.
 - Sample holder volume 10 cm³.
 - Dynamic Vapour Sorption (DVS) and Dynamic Dew Point Isotherm (DDI).
 - Relative humidity range 3 – 95 %.
 - Temperature range 15 – 60 °C.
 - Measurement accuracy of relative humidity 0.5 %.
 - Temperature stability ± 0.1 °C.
 - Mass resolution 0.5 mg.
 - Measurement speed: ~ 2 days/full isotherm.



Figure 8: AquaLab VSA (METER Group) [9].

8. Gas Diffusion Coefficient

The gas diffusion coefficient characterizes how permeable to gas is a porous material. It can be measured with the Oxygen Diffusion Apparatus ODA 20, an instrument that has developed at Aalborg University [10].

- **ODA 20** (see Figure 9):
 - Small-size cylindrical test sample: diameter 53 mm, length 50 mm.
 - Measurement speed: ~ 1-3 hour/measurement.

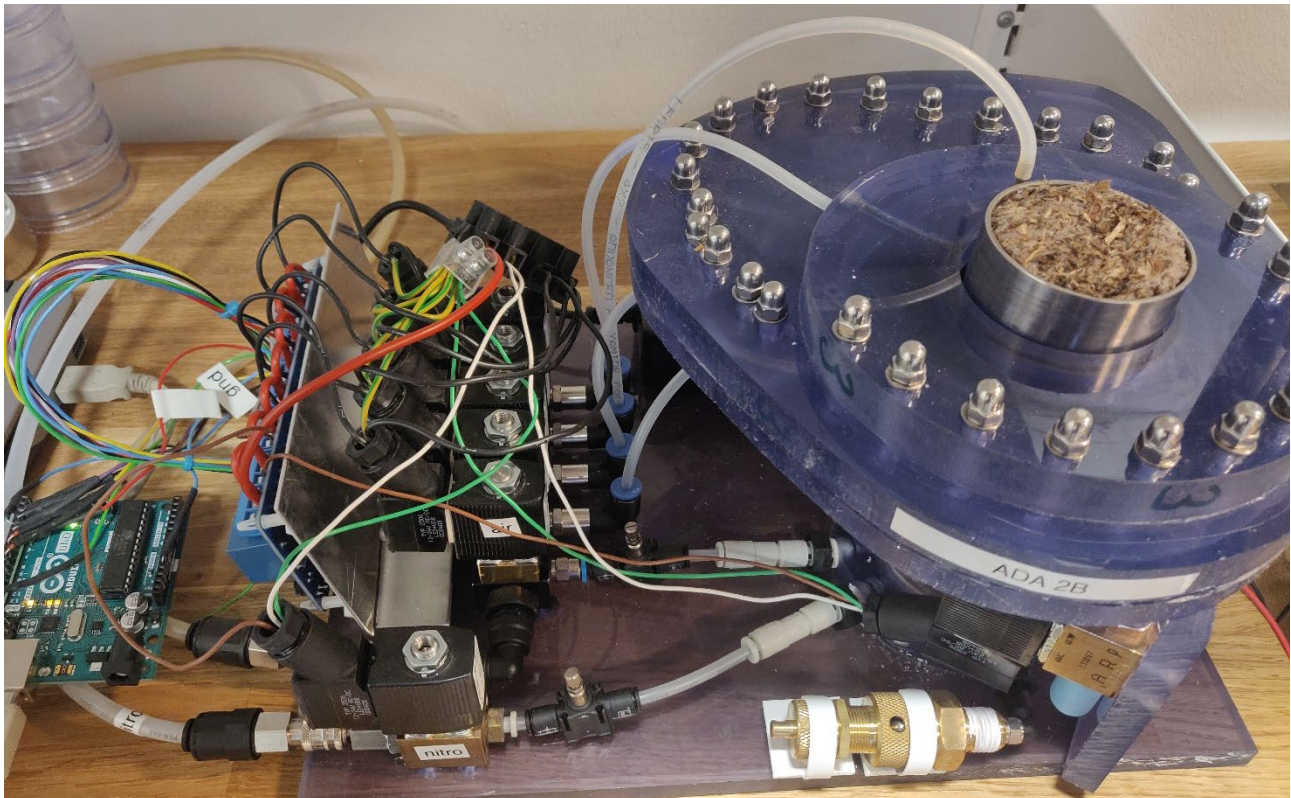


Figure 9: The oxygen diffusion apparatus ODA 20 for the measurement of the gas diffusion coefficient in porous materials [10].

References

- [1] Building Material Characterization Laboratory of Aalborg University, Department of Civil Engineering, Aalborg, Denmark.
<https://buildingmaterials.civil.aau.dk>
- [2] Mettler Toledo, Laboratory weighing applications, Density measurement.
https://www.mt.com/ch/en/home/applications/Laboratory_weighing/density-measurement.html
- [3] Sartorius Lab Instruments GmbH & Co, Laboratory weight balances.
<https://www.sartorius.com/en/products/weighing/laboratory-balances>
- [4] Hicham Johra. Description of the Guarded Hot Plate Method for thermal conductivity measurement with the EP500. DCE Lecture Notes No. 75. Department of Civil Engineering, Aalborg University, 2019.
https://vbn.aau.dk/ws/portalfiles/portal/317020205/Description_of_the_Guarded_Hot_Plate_Method_for_Thermal_Conductivity_Measurement_with_the_EP500.pdf
- [5] Netzsch Gerätebau GmbH. Operating Instructions Nano-Flash-Apparatus LFA 447, 2001.
- [6] <http://www.lambda-messtechnik.de/en.html>
- [7] Hicham Johra. Description of the laser flash analysis method for thermal diffusivity measurement with the LFA 447. DCE Lecture Notes No. 73. Department of Civil Engineering, Aalborg University, 2019.
https://vbn.aau.dk/ws/portalfiles/portal/312969074/Description_of_the_Laser_Flash_Analysis_Method_for_Thermal_Diffusivity_Measurement_with_the_LFA_447.pdf
- [8] BINDER GmbH, Drying oven chamber FP 115.
<https://www.binder-world.com/en/products/drying-and-heating-chambers/series-fp-classicline/fp-115>
- [9] Vapor Sorption Analyzer AquaLab.
<https://www.metergroup.com/food/products/vsa/>
- [10] K.M. Frandsen, Y.I. Antonov, H. Johra, P. Møldrup, R.L. Jensen (2020). Experimental investigation of water vapour diffusivity in bio-based building materials by a novel measurement method. Proceedings of the RM4L Resilient Materials 4 Life 2020 International Conference. Cambridge, U.K., 14-17 September 2020.

Recent publications in the DCE Lecture Note Series

Johan Christian Clausen. Third Semester and Master's Thesis Ideas 2019: M.Sc. in Civil and Structural Engineering. DCE Latest News No. 58. Department of Civil Engineering, Aalborg University, 2019.

